

Industrial Grade Single Parameter Air Quality Monitor



AQBot™ is an industrial air quality monitor with automation capabilities. AQBot™ Series offers a wide range of air quality parameters to choose from. The range of available parameters consists of all the important Gases, Particulates, and Noise related monitoring for Industrial scenarios. AQBot™ product range consists of critical ambient parameters and toxic gases like Total Volatile Organic Compounds (TVOC), Ammonia (NH₃), Hydrogen sulfide (H₂S), Methane (CH₄), Carbon Monoxide (CO), Formaldehyde (CH₂O), Particulate Matter (PM₁, PM_{2.5}, PM₁₀, PM₁₀₀), Ambient Noise, etc. The AQBot series is designed for easy and inexpensive maintenance.

Product Features



On Device Display



Ultimate Durability



Weatherproof Enclosure



Compact and Lightweight



Internal Data Storage



SMS and Email Alerts



Real-Time Data



Built-in Relay



Wired Communications



Wireless Communications



Over-The-Air Updates




Data Analytics Software

Why Monitor Carbon Monoxide?

CO is a colorless, odorless, non-irritating, and tasteless, poisonous gas found in the atmosphere. Incomplete combustion of carbon-containing fuels such as coal, gasoline, natural gas, oil, and wood produces this critical air pollutant. Initial symptoms of CO poisoning may include flu-like symptoms such as headache, dizziness, weakness, nausea, and fatigue. In case of prolonged exposures, this may advance to vomiting, loss of consciousness, and collapse. Various industrial processes such as metal manufacturing, mining of metal ore and coal, food processing industries, power generation, oil and gas extraction and refining functions oil and gas from either land or sea, production of chemicals, manufacturing of concrete and plaster also contribute to CO emission. Real-time CO monitoring helps to control the emissions when preventive actions are taken by health and safety authorities.

Product Applications

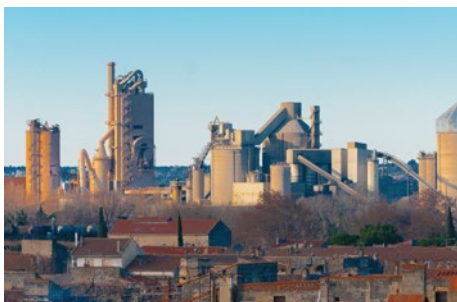

Cement Industry
Rotary Kiln and Vertical Shaft Kiln,
Clinker



Thermal Power Plants
Fuel combustion in boiler

The best in class Carbon Monoxide Monitor

AQBot™ consists of the NEMA 4X approved enclosure to last long in a harsh industrial environment. It offers all industry-standard output signals like MODBUS, CANbus, RS-485, RS-232, etc. In addition, the fixed air quality monitor can also offer other communication modes like GSM, GPRS, 3G, WiFi, LoRa, Ethernet, etc. The monitor can easily integrate with existing building monitoring or plant control systems infrastructure. Using such a wide range of communication capabilities, AQBot™ enables the Industrial Internet Of Things (IIoT) which is the backbone of Industrial Revolution 4.0. Using such a wide range of communication capabilities, AQBot™ enables the Industrial Internet Of Things (IIoT) which is the backbone of Industrial Revolution 4.0.

Key Benefits

- Quick sensing for threshold based alerts
- Highly accurate data to detect low ppb concentrations
- Robust built to sustain harsh industrial conditions
- Easy data integrations to match industry standards
- In built relay operation for automation
- Data transmissions through multiple channels
- Real time data display for keeping a check
- Siren and strobe for audio and visual alerts
- Effortless installations with versatile mounting arrangement

AQBot Specifications

ID	PARAMETER	RANGE	RESOLUTION
OZCO_1	Carbon Monoxide	0-50 ppm	0.1 ppm
OZCO_2	(CO)	0-100 ppm	0.1 ppm
OZCO_3		0-1000 ppm	0.75 ppm



Electrochemical Sensing

TECHNICAL

Processor	Quad-Core ARM Cortex A-72
Memory	2GB RAM, 8GB eMMC ROM
Internal Data Storage	Up to 12 months
Device Interface	On-device software, API, Display
Display Specification	6 digit 7 Segment Display

ELECTRICAL

Power Supply	AC: 90VAC- 265VAC 50/60Hz
Power consumption	3.5 W
Wiring connections	Pre-wired supplied with 2m cable

GENERAL PERFORMANCE

Operation temperature	-20 to +60°C
Operation humidity	0 - 90%RH, non-condensing
Storage conditions	10 - 40°C
Net Weight	2.8 kg
Dimensions	210mm (W) × 258mm (H) × 105mm (D)
Installation method	Wall mount / Pole mount
Housing	NEMA-4X Fire-retardant FRP enclosure
Weather Protection	Weather Resistant IP66 Enclosure

COMMUNICATION

Wireless Communications	Global 2G/3G/4G, LoRa, LTE, NB-IoT, Sigfox, Wifi (Any one)
Wired Communications	Ethernet, MODBUS TCP, MODBUS RTU, RS-485, CAN bus (Any one)
Analog Output	1 x 4~20mA Current Loop with 12-bit Resolution
Relay Outputs	2 programmable relays, volt free relay contacts (1NO, 1 NC)
Beacon/sounder	Built-in, RED flashing light with alarm sounder 95db @ 1m

SENSING

Gas sample mode	Natural diffusion
Warm up time	1 hour (cold start) for gas monitoring
Response Time (T90)	< 60 Seconds
Signal refresh rate	5 Seconds
Accuracy	<±5%FS (at 20±5°C/ 50±20%RH)
Sensor life	2 years

Accurate Air Quality Monitoring And Advanced Data Analytics



306, Indraprasth Corporate,
Prahlanagar, Ahmedabad - India
✉ contact@oizom.com / connect@oizom.com
☎ +91 88666 60025 / 39

Visit us at
www.oizom.com