

## Ambient Air Quality Monitoring Device



Polludrone is a Continuous Ambient Air Quality Monitoring System (CAAQMS). It is capable of monitoring various environmental parameters related to air quality, noise, odour, weather, radiation etc. It measures the particulate matter and gaseous concentrations in the ambient air in real-time. Using external probes, it can also monitor other auxiliary parameters like traffic, disaster etc.

Polludrone is an ideal choice for smart cities as well as urban infrastructure applications like roadside, campus, and airport monitoring. It is easily integrable with a Smart Pole/Intelligent Pole.

## Product Features



Ultimate Durability



Weather Resistant



Compact and Lightweight



Solar Powered



Retrofit Design



Real-Time Data



Tamper Proof



Network Agnostic



Over-The-Air Updates



3-level Calibration

## Our Technology

The air pollution monitoring equipment has all the air quality sensor modules integrated into a single enclosure. Each sensor module works on different technologies. Our sensing technology works on proven working principles such as NDIR, Electrochemical Analysis, Semiconductor, Optical Measurement, and Laser-Scattering. As a part of our proprietary 'Micro Active Sampling' (e-breathing technology), we also have a sophisticated suction-and-exhaust system for air sample collection and monitoring inside a controlled environment. In other words, this isolates the effect of the external environment on measurement to achieve 13% higher accuracy than the industry standards.

## Product Usecases



### Airports

Pollution and noise monitoring at taxiways and terminal surroundings facilitates airport authorities to analyze its impact on surrounding neighbourhoods.




### Industries

Measuring air pollution in industries allows EHS managers to continuously track and mitigate any potential hazards.

## General Specifications

Size	360mm (H) x 328mm (W) x 200mm (D)
Weight	9.8 Kg
Material	Aluminum Magnesium Alloy, Mild-steel (With Powder Coating), FRP
Certifications	CE & FCC Certified, PTCRB Certified Communication Module
Avg. Power Consumption	2.5 Watt (Actual consumption depends upon the number of parameters)
Power Input Options	External 110-230V AC 50-60Hz, 40Watt Monocrystal Solar Panel
Operating Temperature	-20 °C to 60 °C

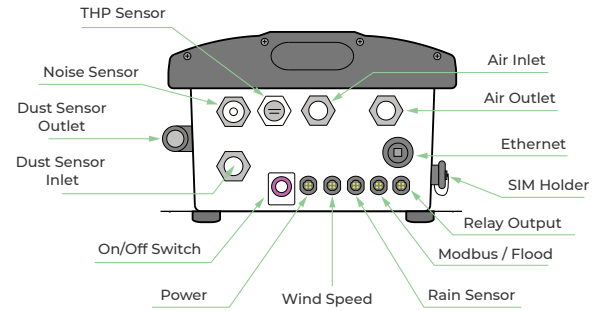

## Connectivity Options

Wireless Connectivity-GSM, LoRA LTE NB-Iot Sigfox Wifi

Wired Connectivity- Ethernet MODBUS

## Sensing Parameters

ID	Parameter	Range	Resolution	Min. Detection	Drift	Working Principle	Measurement Principle	Sample Rate	Expected Sensor Life		
OZPM_1	Suspended Particulate Matters with size less than 2.5µ (PM <sub>2.5</sub> )	Upto 5000 µg/m <sup>3</sup>	0.1 µg/m <sup>3</sup>	1 µg/m <sup>3</sup>	N.A.	Optical Particle Counter	Active Sampling	1 L/min	5000 hours		
OZPM_2	Suspended Particulate Matters with size less than 10µ (PM <sub>10</sub> )										
OZPM_3	Ultra Fine Particulate Matters with size less than 1µ (PM <sub>1</sub> )										
OZPM_4	Total Suspended Particulates (PM <sub>100</sub> )	0-30mg/m <sup>3</sup>									
OZCO2_1	Carbon Dioxide (CO <sub>2</sub> )	0-5000 ppm	1 ppm	400 ppm	±5 ppm / Year	NDIR		Electrochemical		325 mL per sample	2 years
OZCO_2	Carbon Monoxide (CO)	0-100 ppm	0.1 ppm	0.1 ppm	< 2% / Month						
OZSO2_1	Sulfur Dioxide (SO <sub>2</sub> )	0-20 ppm	0.001 ppm	0.01 ppm	±20 ppb / Year						
OZNO_1	Nitric Oxide (NO)	0-20 ppm	0.001 ppm	0.01 ppm	±50 ppb / Year						
OZNO2_1	Nitrogen Dioxide (NO <sub>2</sub> )	0-20 ppm	0.001 ppm	0.01 ppm	±20 ppb / Year						
OZO3_1	Ozone (O <sub>3</sub> )	0-20 ppm	0.001 ppm	0.01 ppm	±20 ppb / Year						
OZH2S_1	Hydrogen Sulfide (H <sub>2</sub> S)	0-10 ppm	0.001 ppm	0.01 ppm	±100 ppb / Year						
OZN_1	Ambient Noise	Upto 140 dB	1 dB	0.5 dB	N.A.	Capacitive	Passive Monitoring	N.A.	3 years		
OZLL_1	Light Intensity	Up to 1,00,000 Lux	1 Lux	1 Lux	N.A.	Photo-conductivity					
OZUV_1	UV Radiation (0-12 UVI)	0.1-100,000 uW/cm <sup>2</sup>	0.1 uW/cm <sup>2</sup>	0.1 uW/cm <sup>2</sup>	N.A.						
OZVLI_1	Visible Light Intensity	Up to 5000 Lux	0.1 Lux	0.1 Lux	N.A.	Solid state semi conductor sensing		N.A.	2 years		
OZTEMP_1	Temperature	-40 to 125°C	0.01°C	-40 °C	N.A.						
OZHUM_1	Humidity	100% Rh	0.1%	0.1%	N.A.						
OZPRES_1	Barometric Pressure	300-1100 hPa	0.18 Pa	300 hPa	N.A.						

Accurate Air Quality Monitoring And Advanced Data Analytics



**OIZOM**  
REDEFINING RESOURCES

306, Indraprasth Corporate,  
Prahlanadnagar, Ahmedabad - India

contact@oizom.com / hello@oizom.com

+91-8866660025 / 39

Visit us at:  
www.oizom.com