


Polludrone[®]

Ambient Air Quality Monitoring System



About Polludrone®

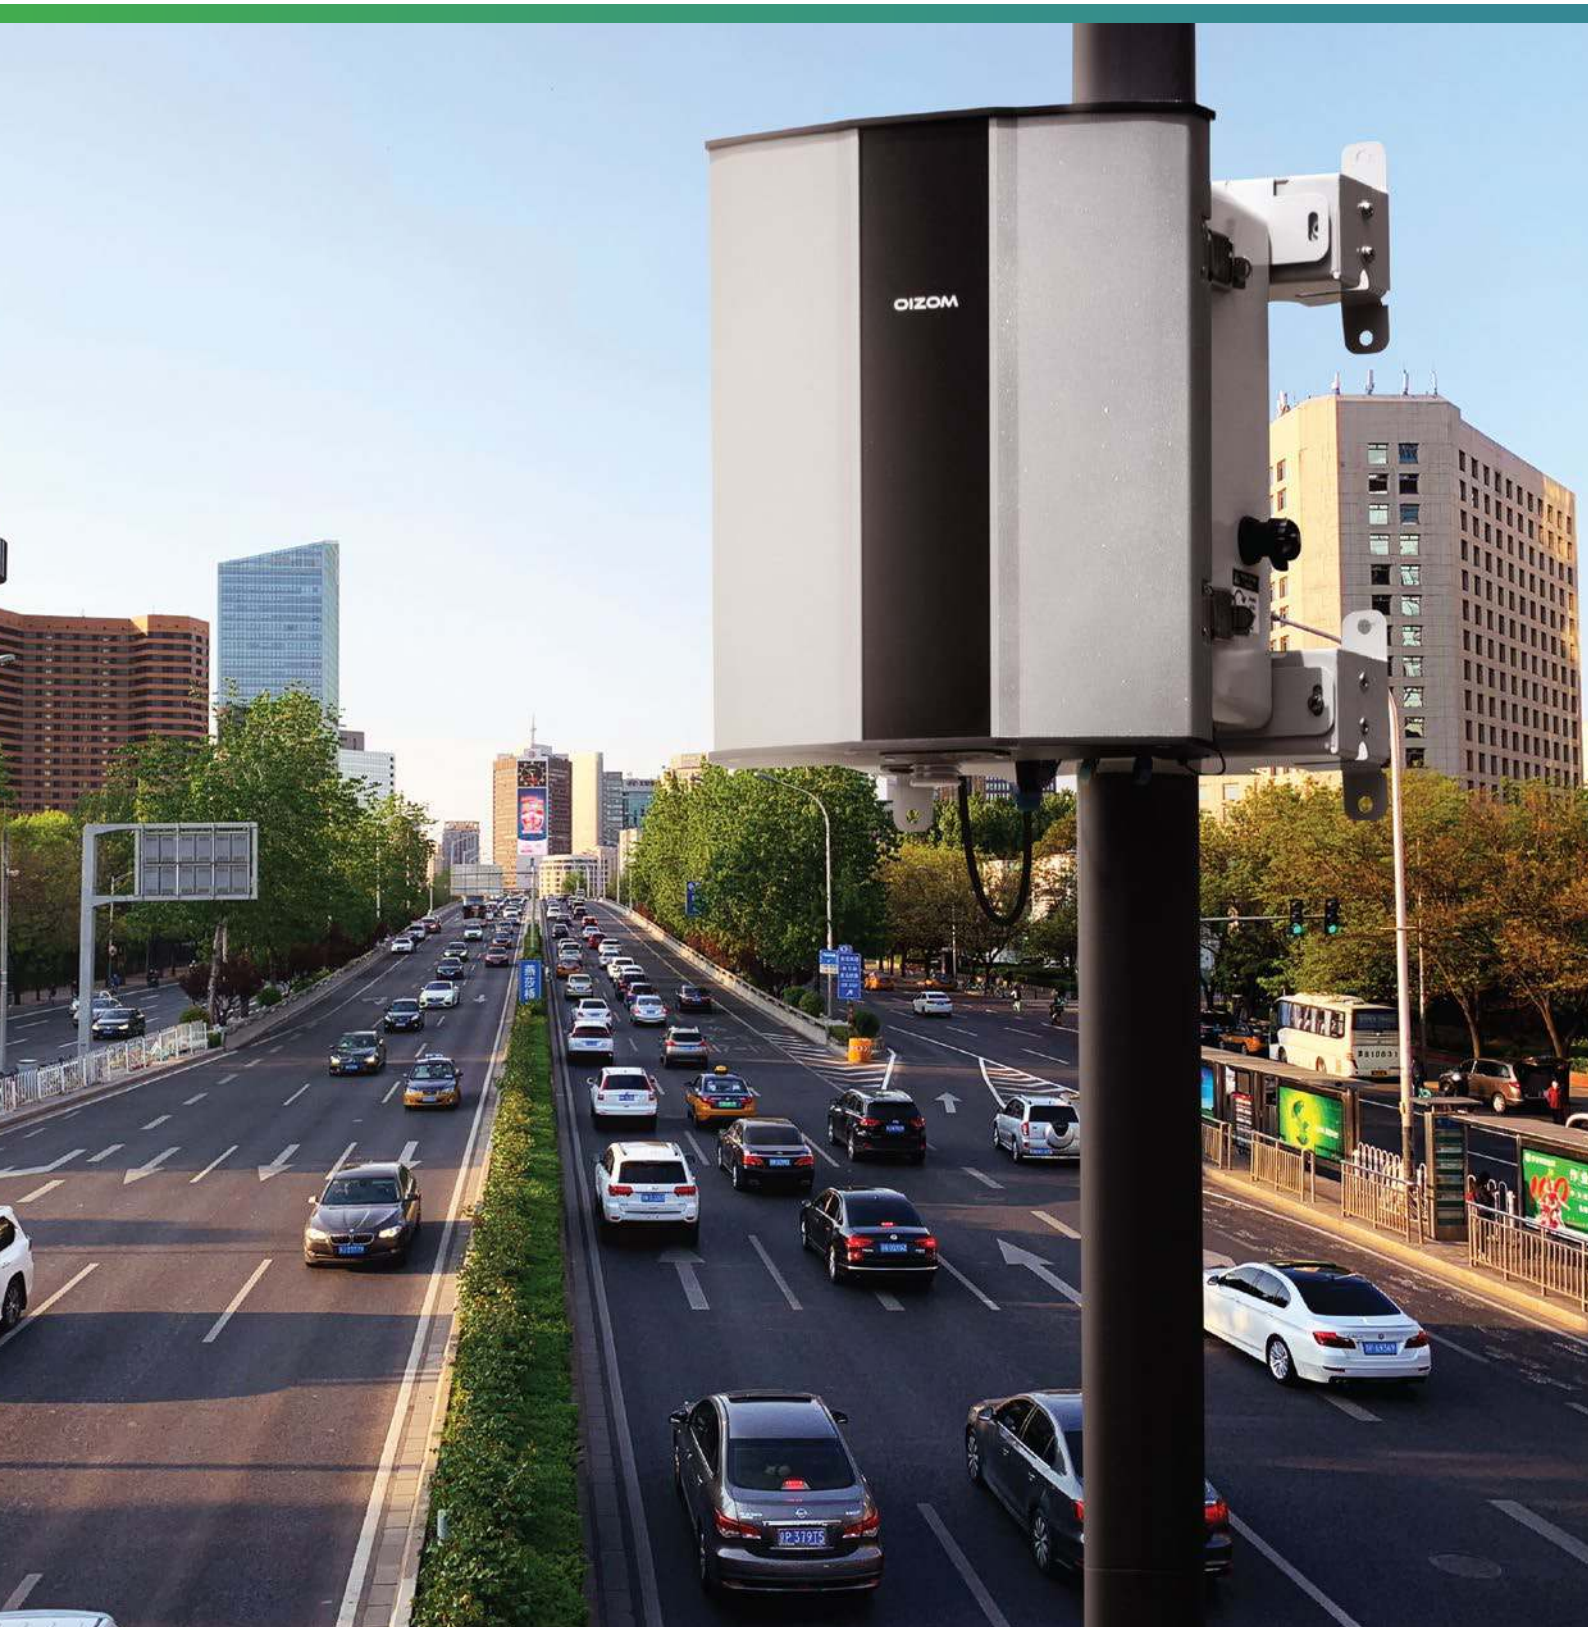

Polludrone® is a Continuous Ambient Air Quality Monitoring System (CAAQMS). It is capable of monitoring various environmental parameters related to air quality, noise, odour, weather, radiation. It measures the particulate matter and gaseous concentrations in the ambient air in real-time. Using external probes, it can also monitor other auxiliary parameters like traffic, disaster and weather monitoring.

Polludrone® is an ideal choice for smart cities as well as urban infrastructure applications like roads and highways, tunnels, smart campus and airport monitoring. It is easily integrable with a Smart Pole / Intelligent Pole.

Product Features



Patented Technology

Works on innovative e-breathing technology for higher data accuracy.



Tamper Proof

Comes with a security system to avoid tampering / malfunction / sabotage.



Retrofit Design

Plug and play design for ease of implementation.



Over-The-Air Update

Automatically upgradeable from a central server without any onsite visit.



Compact

Light-weight and compact system that can be installed at 12-15 feet (4-5 m) height.



Network Agnostic

Supports a wide range of connectivity options like GSM / GPRS / WiFi / LoRa / NBIoT / Ethernet / Modbus.



Internal Storage

Internal data storage capacity of upto 8 GB or 90 days.



Real-Time Data

Continuous monitoring and real-time data transfer at configurable intervals.



On-device Calibration

On-site device calibration capability using on-device calibration software.



Weather Resistant

IP66 Grade (certified) enclosure for endurance against harsh weather.



Identity And Configuration

Each equipment carries its unique identity with geo-tagging through wireless configuration.



Solar Powered with Battery Backup

Compatible to charge internal battery using solar power.

Key Benefits



Robust And Rugged

Durable enclosure to sustain extreme climatic conditions.



Multi-parameter

Compatible with a wide range of parameters including PM, gases and meteorological parameters



Seamless Connectivity

A wide range of options of wired and wireless connectivity.



Cloud Platform

Visualise and analyse data in the cloud. Easy data integration via APIs.



Accurate Data

Gives accurate readings in real-time to detect concentrations in ambient air.



Easy to install

Effortless installation with versatile mounting arrangements.

Polludrone® Usecases



Smart City

Pollution monitoring at strategic locations in a smart-city empowers city authorities to obtain actionable insights for pollution control.



Roads And Highways

Pollution monitoring at roads and tunnels can help create pollution mitigation action plan to control vehicular emissions.



Smart Campus

Pollution monitoring at key locations on campus allows stakeholders to spread awareness about environmental conditions of the premises.



Airports

Pollution and noise monitoring at taxiways and terminal surroundings facilitates airport authorities to analyze its impact on travellers and surrounding neighbourhoods.

Polludrone® Variants

Variants	Applications	Parameters
Polludrone® Lite	General Purpose	PM _{2.5} , PM ₁₀ , CO ₂ , CO, Noise, Light, UV-Radiation, Temperature, Humidity, Pressure
Polludrone® Smart	Extensive	PM _{2.5} , PM ₁₀ , CO ₂ , CO, SO ₂ , NO, NO ₂ , O ₃ , Noise, Light, UV - Radiation, Temperature, Humidity, Pressure
Polludrone® Pro	Critical	PM ₁ , PM _{2.5} , PM ₁₀ , PM ₁₀₀ (TSP), CO ₂ , CO, SO ₂ , NO, NO ₂ , O ₃ , H ₂ S, Noise, Light, UV-Radiation, Temperature, Humidity, Pressure
External Modules	Optional	Wind Speed and Direction, Rainfall, Pressure (integrable with all 3 variants)

Parameters

ID	Parameter	Range	Resolution	Min. Detection	Drift	Working Principle	Measurement Principle	Sample Rate	Expected Sensor Life		
OZPM_1	Suspended Particulate Matters with size less than 2.5µ (PM _{2.5})	Upto 5000 µg/m ³	0.1 µg/m ³	1 µg/m ³	N.A.	Optical Particle Counter	Active Sampling	1 L /min	5000 hours		
OZPM_2	Suspended Particulate Matters with size less than 10µ (PM ₁₀)										
OZPM_3	Ultra Fine Particulate Matters with size less than 1µ (PM ₁)										
OZPM_4	Total Suspended Particulates (PM ₁₀₀)	Upto 30 mg/m ³	1 ppm	400 ppm	±5 ppm / Year	NDIR		325 mL per sample	2 years		
OZCO2_1	Carbon Dioxide (CO ₂)	0-5000 ppm									
OZCO_1	Carbon Monoxide (CO)	0-5 ppm				0.01 ppm				0.01 ppm	< 1ppm/year
OZSO2_1	Sulfur Dioxide (SO ₂)	0-10 ppm				0.001 ppm				0.01 ppm	±20 ppb / Year
OZNO_1	Nitric Oxide (NO)	0-5 ppm				0.001 ppm				0.01 ppm	±50 ppb / Year
OZNO2_1	Nitrogen Dioxide (NO ₂)	0-10 ppm				0.001 ppm				0.01 ppm	±20 ppb / Year
OZO3_1	Ozone (O ₃)	0-20 ppm				0.001 ppm				0.01 ppm	±20 ppb / Year
OZH2S_1	Hydrogen Sulfide (H ₂ S)	0-1.5 ppm				0.001 ppm				0.01 ppm	±100 ppb / Year
OZN_1	Ambient Noise	Upto 140 dB	1 dB	0.5 dB	N.A.	Capacitive	Passive Monitoring	N.A.	3 years		
OZLI_1	Light Intensity	Up to 1,00,000 Lux	1 Lux	1 Lux	N.A.	Photo-conductivity					
OZUV_1	UV Radiation (0-12 UVI)	0.1-100,000 uW/cm2	0.1 uW/cm ²	0.1 uW/cm ²	N.A.						
OZVLI_1	Visible Light Intensity	Up to 5000 Lux	0.1 Lux	0.1 Lux	N.A.	Solid state semi conductor sensing			2 years		
OZTEMP_1	Temperature	-40 to 125°C	0.01°C	-40 °C	N.A.						
OZHUM_1	Humidity	100% Rh	0.1%	0.1%	N.A.						
OZPRES_1	Barometric Pressure	300-1100 hPa	0.18 Pa	300 hPa	N.A.						

Note - If a custom range and resolution of a sensor is required, please contact our team.

External Modules (optional)




Rain Sensor
Tipping Bucket
In mm / inch



Wind Sensor
Ultrasonic sensor
0-359°, 0-40 m/s

Specifications

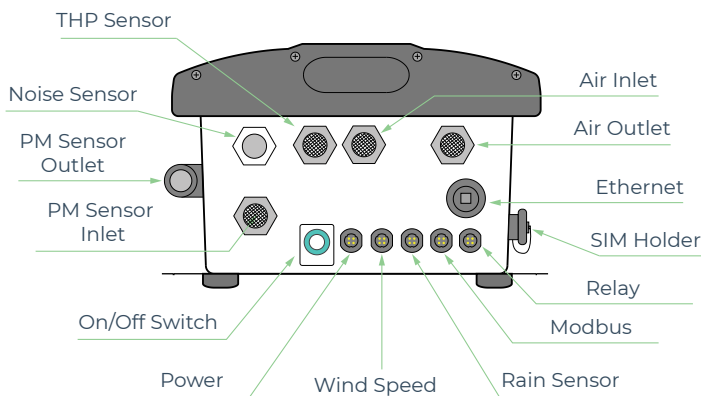

Power

Avg. Power Consumption	5 Watt (Actual consumption depends upon the number of parameters)
Power Input Options	External 110-240V AC 50-60Hz, 60Watt Monocrystal Solar Panel
SMPS Specs	24V, 2Amps output UL-62368 & CAN/CSA C22.2 Certified
Battery Backup Time	Upto 12 Hours
Battery Specs	Lithium iron phosphate (LiFePO4) battery cell with rated voltage 12.8V Capacity 6Ah

Communication

Data Interval	5-30 (configurable) minutes
Data-push Protocol	HTTP post request to host server
Data-pull	HTTP request on device IP
Firmware Updates	Over-The-Air Firmware Update
Standby Connectivity	GSM (2G/3G/4G) for remote diagnosis, FOTA updates, and cloud calibration



General Specs

Size	360mm (H) x 328mm (W) x 200mm (D)
Weight	7.2 Kg (instrument weight)
Material	Aluminum Magnesium Alloy, Mild-steel (With Powder Coating), FRP
Certifications	CE & FCC Certified, PTCRB Certified Communication Module



Technical Specs


Processor	Quad Core ARM Cortex
Memory	2GB RAM / 8GB eMMC ROM
Device Interface	On-device Software / API
Operating Temperature	-20 °C to 60 °C
Operating Humidity	0-93% RH
Recommended Humidity	15-90% RH

	Connectivity Options	Specification
Wireless	GSM LoRa LTE NB-IoT Sigfox Wifi	Global 2G / 3G / 4G 868 MHz / 915 MHz CAT-M1 CAT-NB1 868 to 869 MHz, 902 to 928 MHz AP Mode and Station Mode
Wired	Ethernet Modbus Relay Output	Static / DHCP Configuration RS485 RTU / TCP 2 Channel

Functional Specifications

Proper location selection is critical for optimized data collection. It varies as per the purpose of the project. According to USEPA QA handbook (Vol II, Section 6.0 Rev.1), the selection of locations should be based on monitoring purposes.

Preferred Mounting	Pole / Wall (preferably 270° open surrounding)
Installation Height	12-15 feet (4-5 meters)
Direction	As per maximum direct sunlight exposure
Power Availability	Constant AC / DC supply within a 2-meter range from the unit or solar panel
Network Availability	Uninterrupted network connection

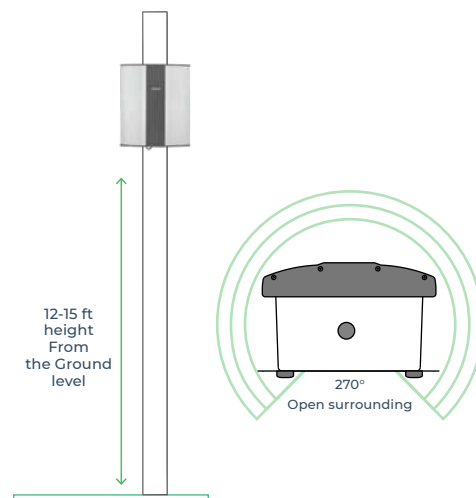

Data and Calibration

1 Laboratory Calibration

All air quality monitoring systems are calibrated at the ISO/IEC 17025:2017 certified calibration laboratory using standard NIST traceable calibration gas standards as per the international guidelines by USEPA.



2 Collocation Calibration

The monitors are operated adjacent to a custom built reference station housing U.S. EPA designated Federal Equivalent Method (FEM) for collocation calibration to ensure optimum data quality.




3 On-site Calibration


On-site calibration of Oizom® devices can be performed using standard calibration gas cylinders of known concentration or by co-locating with a reference standard.



Solution Architecture

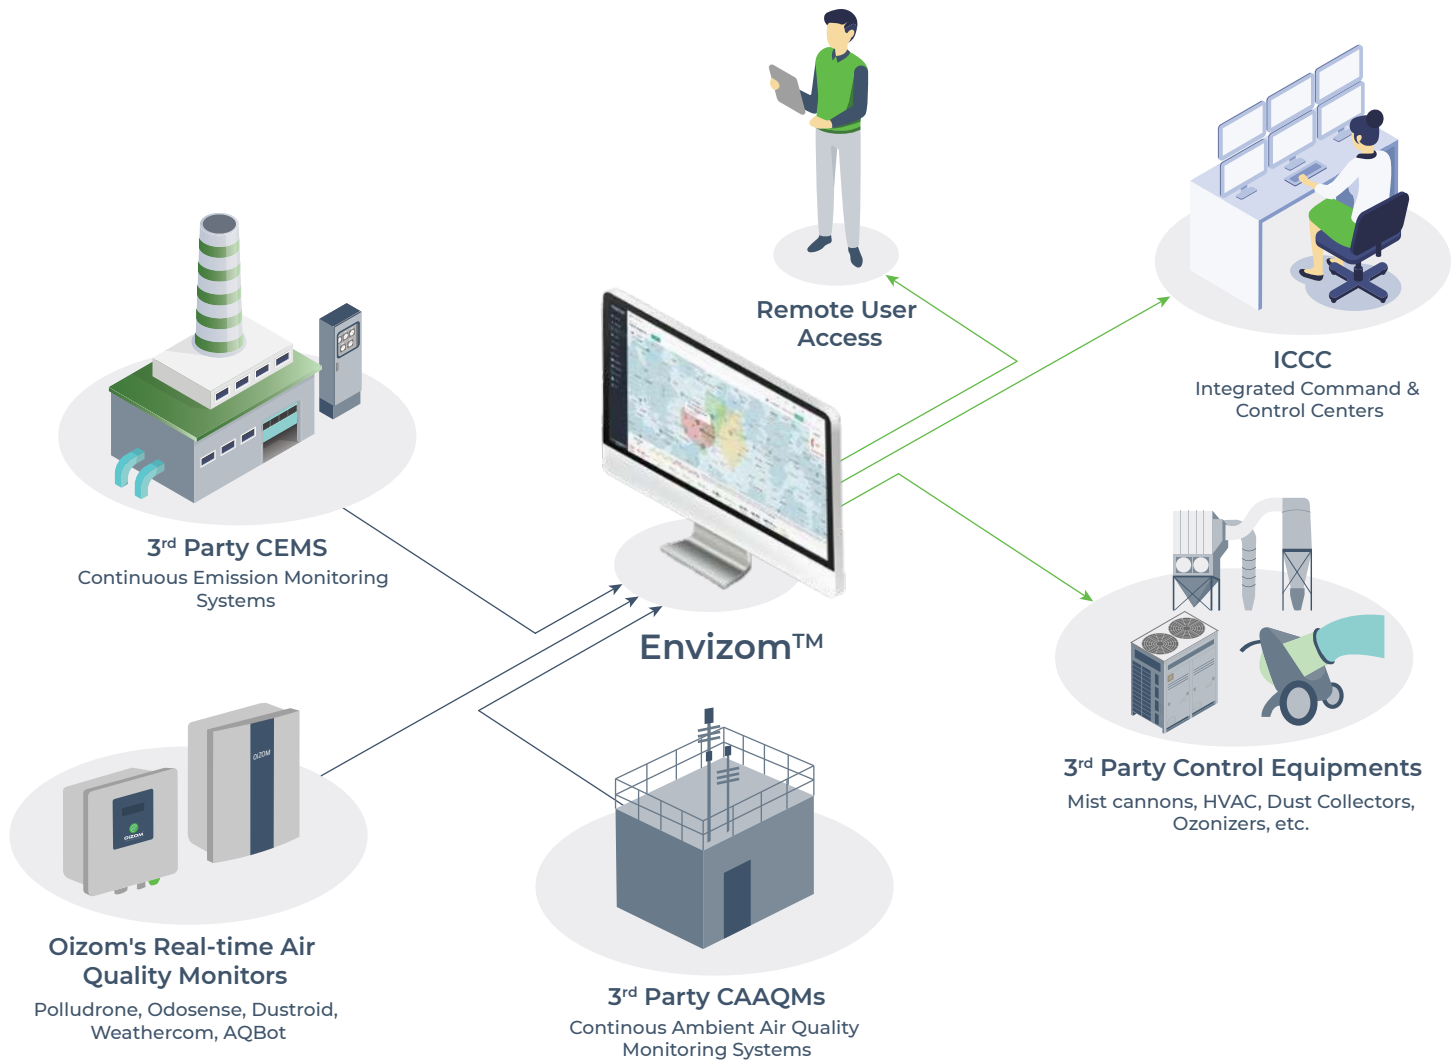


Envizom™ Air Quality Software

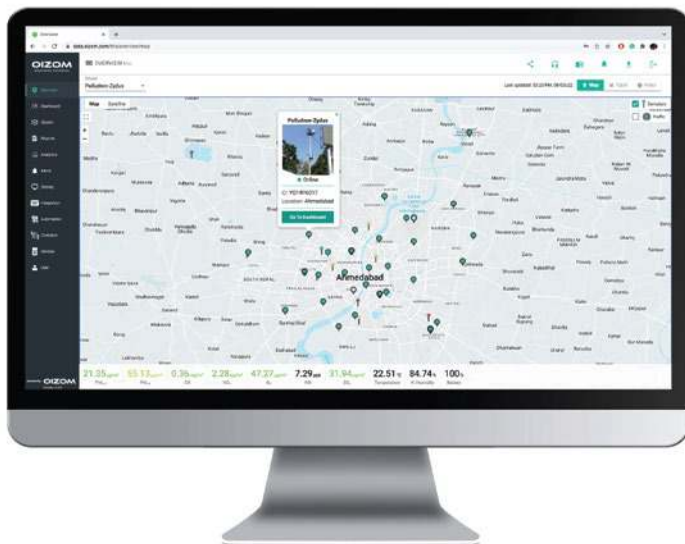

An on-device data software enables users to access the data, configure networks and sensors without any dependency on the internet. Users can also connect their smart devices to Polludrone and view real-time data, perform on-site calibration, change network configuration, and change sensor configuration.

Envizom™ Features

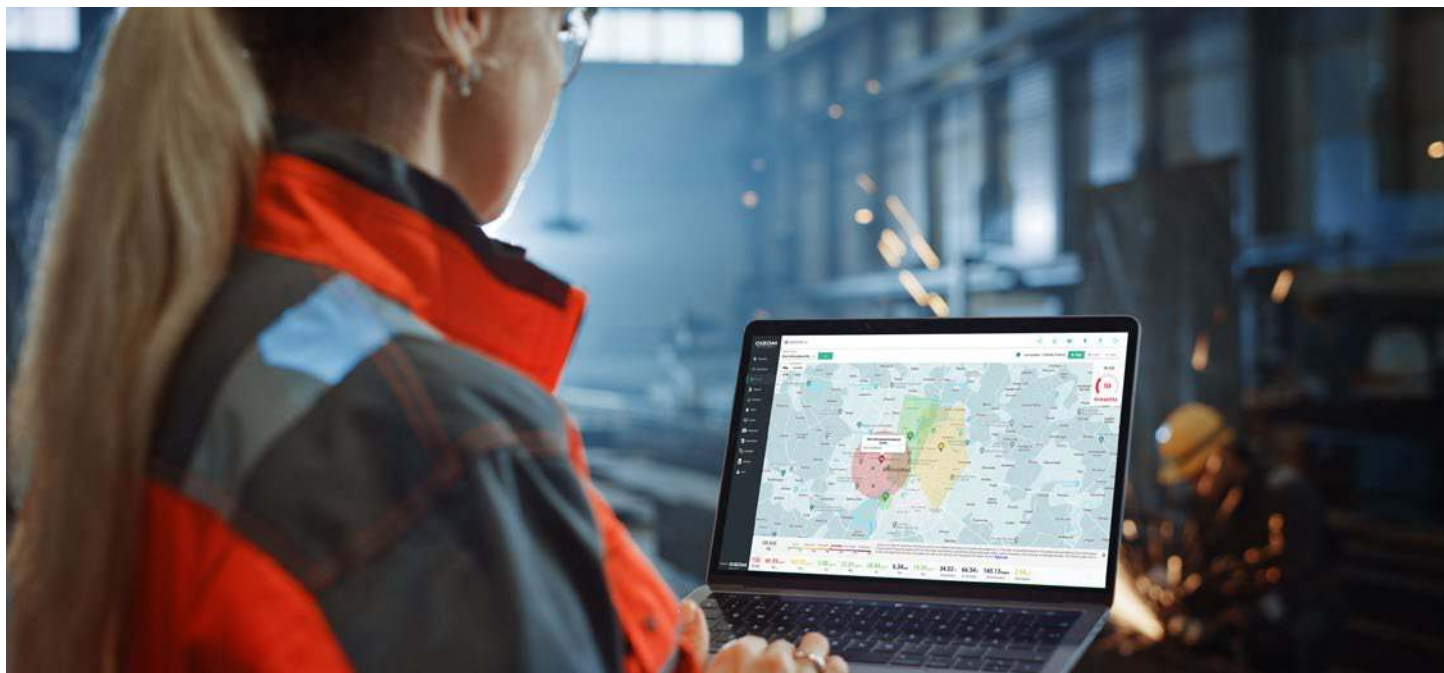

Real-time data



Smart alerts



User friendly interface



Easy to Set Up



One click share



Data accessibility

Privacy First Platform



Data Privacy

The data shared with the client uses an encryption server through HTTPS Secure Socket layers. Envizom™ also uses AES encryption for connection that adds to data safety.



Data Ownership

Envizom™ creates a secured and encrypted password combination for the user login. Oizom® ensures 100% privacy of the data and doesn't share without relevant permissions.



Data Transparency

Data collected from Oizom® equipment runs through the Environment Data Interpretation Engine. It processes various algorithms and eliminates environmental impact interferences on the sensors.

Case Studies



Ensuring environmental safety at Dangote Cement Plant

The communities living near Dangote Cement Plant were starting to raise concerns about the bad air quality due to excessive dust-laden activities. Oizom deployed Polludrones® in the area to ensure environmental safety.



Ethiopia



August 2021



Fenceline

Air Quality Monitoring at Imphal Smart City, India

Imphal Smart City deployed air quality monitoring devices in the city to understand the spatial variations and ascertain the reasons for degrees of pollution.



India



July 2020



Smart City



Smart city air quality monitoring at Agra, India

High levels of PM_{10} and $PM_{2.5}$ were rapidly degrading the air quality of Agra city. Oizom® helped in monitoring the air quality by installing Polludrones® all across the city.



India



August 2019



Smart City



Case Studies



Air Quality Monitoring at Granada University

With over 61,000 students and staff in residence, the University of Granada aimed to provide a healthier environment to its students. Polludrone® monitored ambient parameters within the campus and displayed the data to the students.



Spain



April 2019



Smart Campus

Monitoring Ambient Air quality at J.P. Medanta Hospital

Oizom® is monitoring the Ambient Air Quality around the JP Medanta Hospital by installing Polludrone® and empowering the hospital administrators.



India



July 2021



Hospitals



Detecting forest fires by monitoring Air Quality in Portland

Oizom® is detecting forest fires in Portland by monitoring air quality with its real-time air quality monitoring system, Polludrone®.



USA



April 2021



Flora And Fauna



About Oizom®



Leaders in sensor based
air quality monitoring



Plug and play monitors
for hassle free setup



Low powered solutions
for multiple applications

Oizom® is an environmental IoT company offering data-driven environmental solutions for better decision-making. With our sensor-based hardware, we monitor various environmental parameters like air quality, noise, odour, radiation, weather conditions, etc. Our data analytics platform derives many actionable insights for authorities, communities, and industries. Oizom® strives to play an essential role in a sustainable future through smart environmental solutions and data science.

Oizom® has years of experience in stimulating innovation by creating groundbreaking technology for environmental monitoring. With an IoT-based development approach, Oizom® has been able to successfully unlock multiple solutions, catering to various industries.

Other Oizom® Products



Odosense®

Odour Monitoring System

Odosense® monitors various odourful and toxic gases in the environment and provides insight into odour dispersion.



Dustroid®

Real-time Dust Monitor

Dustroid® is an online particulate monitoring system to measure a wide spectrum of particulate matter sizes.



Weathercom®

Automatic Weather Station

Weathercom® is an automatic weather station designed to measure various meteorological parameters.



AQBot™

Single Parameter Air Quality Monitor

AQBot™ is an industrial grade single parameter air quality monitor with automation capabilities.





Trusted by

60+ Countries



Solutions Installed in

65+ Cities



Total Devices Installed

1000+



Total Population Covered

200 million+

Global Presence



Accurate Air Quality Monitoring And Advanced Data Analytics



Get in touch



306, Indraprasth Corporate,
Prahlnadnagar, Ahmedabad - India

✉ contact@oizom.com / connect@oizom.com

☎ +91 88666 60025 / 39