

Odosense[®] Pro

Odor Monitoring Equipment



Odosense is the real-time odour emission tracking solution. Odosense continuously detects, measures and monitors the odourful gaseous contaminants. Oizom Odour Monitoring Solution comprises of a network of e-noses (Odosense) positioned on the periphery of the site. With the help of meteorological data, Odosense can trace the odourant dispersion plume incited by conditions like wind speed and wind direction.



Ultimate
Durability



Weather
Resistant



Compact and
Lightweight



Solar
Powered



Retrofit
Design



Real-Time
Data



Tamper
Proof



Network
Agnostic



Over-The-Air
Updates



3-level
Calibration

Our Technology

Our odour monitoring device works on proven working principles such as NDIR, PID, Electrochemical Analysis, Semiconductor, Optical Measurement. As a part of our proprietary 'Micro Active Sampling' (e-breathing technology), we also have a sophisticated suction-and-exhaust system for air sample collection and monitoring inside a controlled environment. This isolates the effect of the external environment on measurement to achieve 13% higher accuracy than the industry standards.

Odosense[®] Usecases



Landfills



Industries

Parameters

Sensor	ID	Range	Resolution	Min. Detection	Drift	Working Principle	Expected Sensor Life	
Sulfur Dioxide (SO ₂)	OZSO2_1*	0-10 ppm	0.001 ppm	0.01 ppm	±20 ppb / Year	Electrochemical	2 years	
	OZSO2_2	0-100 ppm	0.2 ppm	0.2 ppm	< 2% / Month			
	OZSO2_3	0-2000 ppm	5 ppm	5 ppm	< 2% / Month			
Hydrogen Sulfide (H ₂ S)	OZH2S_1*	0-1.5 ppm	0.001 ppm	0.01 ppm	±100 ppb / Year			
	OZH2S_2	0-50 ppm	0.05 ppm	0.05 ppm	< 2% / Month			
	OZH2S_3	0-200 ppm	0.2 ppm	0.2 ppm	< 2% / Month			
	OZH2S_4	0-2000 ppm	2 ppm	2 ppm	< 2% / Month			
Ammonia (NH ₃)	OZNH3_1*	0-20 ppm	0.3 ppm	0.3 ppm	< 2% / Month			
	OZNH3_2*	0-100 ppm	0.3 ppm	0.3 ppm	< 2% / Month			
	OZNH3_3	0-1000 ppm	2 ppm	2 ppm	< 2% / Month			
Methyl Mercaptan (CH ₃ SH)	OZCH3SH_1*	0-10 ppm	0.1 ppm	0.1 ppm	< 2% / Month			
Total Volatile Organic Compounds (VOC)	OZTVOC_1*	0-40 ppm	0.001 ppm	0.005 ppm	N.A.	Photo Ionization Detection (PID)	5000 Hours	
	OZTVOC_2	0-200 ppm	0.05 ppm	0.05 ppm	N.A.			
Formaldehyde (CH ₂ O)	OZCH2O_1*	0-10 ppm	0.05 ppm	0.05 ppm	< 2% / Month	Electrochemical	2 years	
	OZCH2O_2	0-50 ppm	0.1 ppm	0.1 ppm	< 2% / Month			
Nitrogen Dioxide (NO ₂)		0-10 ppm	0.001 ppm	0.01 ppm	±20 ppb / Year			
	OZNO2_2	0-100 ppm	0.2 ppm	0.2 ppm	< 2% / Month			
	OZNO2_3	0-500 ppm	0.5 ppm	0.5 ppm	< 2% / Month			
Chlorine (Cl ₂)	OZCl2_1*	0-20 ppm	0.05 ppm	0.05 ppm	< 2% / Month			
	OZCl2_2	0 - 50 ppm	0.1 ppm	0.1 ppm	< 2% / Month			
Methane (CH ₄)	OZCH4_1	500-1500 ppm	1 ppm	500 ppm	N.A.			Molecular Property Spectrometer (MPS)
	OZCH4_2	50-10,00,000 ppm	1 ppm	50 ppm	N.A.			
Hydrogen Chloride (HCl)	OZHCl_1	0-50 ppm	0.5 ppm	0.5 ppm	< 2% / Month			Electrochemical
	OZHCl_2	0-100 ppm	1 ppm	1 ppm	< 2% / Month			

External Modules




Anemometer
 OZWSD_1*
Wind Speed: 0-40 m/s
Wind Direction: 0-359°
Working Principle: Ultrasonic



Rain
 OZRAIN_1*
Resolution: 0.25 mm
Working Principle: Tipping Bucket

*Indicates standard delivery timeline.

Specifications

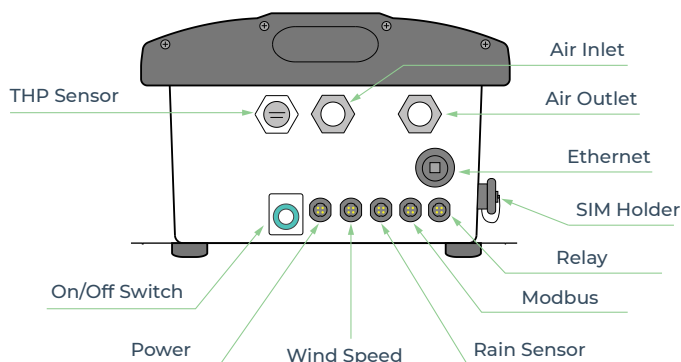

Size	360mm (H) x 328mm (W) x 200mm (D)
Weight	7.2 Kg (instrument weight)
Material	Aluminum Magnesium Alloy, Mild-steel (With Powder Coating), FRP
Certifications	CE, FCC, NEMA 4X, IP66, RoHS

Accurate Air Quality Monitoring And Advanced Data Analytics



306, Indraprasth Corporate,
 Prahladnagar, Ahmedabad - India
 contact@oizom.com / hello@oizom.com
 +91 88666 60025 / 39