

# AQBot<sup>™</sup>

Industrial Grade Single Parameter Air Quality Monitor




# About AQBot™



AQBot™ is an industrial-grade air quality monitoring device designed to measure a specific gas or environmental parameter in real time. AQBot™ unit monitors one chosen pollutant (such as a particular gas, particulate matter, or noise), instead of monitoring dozens of contaminants. This allows industries to tailor their monitoring to what is crucial for them. AQBot™ empowers industries through technology and convenience without compromising the environment, enabling proactive air quality management. AQBot™ is built to withstand industrial conditions (dust, humidity, vibration), making it ideal for sectors like manufacturing, waste treatment, chemicals, and mining.



AQBot™ features a built-in digital display on the device, built-in relay outputs, and attachments like a siren and strobe lights. This allows the monitor to trigger immediate local alarms or control external mitigation equipment when a pollutant exceeds a threshold.

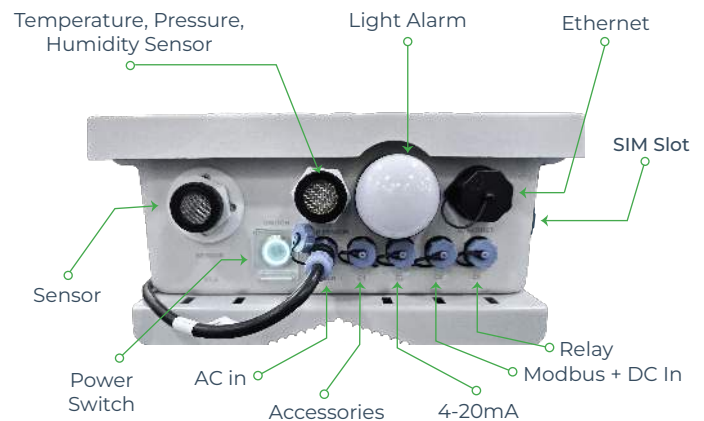

## Product Features



Range of Parameters to Choose from



On-device Display



Real-time Data



Visualisation and Advanced Analytics Software



Built-in Relay for Automation



Siren and Strobe Light for Alerts



Compact



IP 66 Grade Certified



Wired Communication



Wireless Communication



Internal Data Storage



4-20 mA Current Loop



# Key Benefits



## Accurate Data

Gives accurate readings in real-time to detect concentrations in ambient air.



## Robust and Rugged

Durable enclosure to sustain harsh industrial conditions.



## Relay-Based Automation

In-built relay automation systems provide immediate alerts when the threshold limit rises and activate mitigation equipment.



## Secure Cloud Platform

Secure platform for visualising and analysing data, with easy API integration for immediate action.



## Easy to Install

Effortless installation with versatile mounting arrangements.



## Seamless Connectivity

Wide range of connectivity options like GSM, Wi-Fi, LoRa Modbus, Satellite, RS-485, and 4-20mA

## AQBot™ Usecases



### Leak Detection

Comprehensively detect leaks and monitor hazardous gases or harmful chemicals in real-time to trigger alarms when pre-set threshold are exceeded.



### Environmental Automation

Improve your environmental process control by monitoring air pollution, odour and other environmental conditions on a real-time basis.



### Wastewater

Monitoring odour intensity at waste water treatment plants can help regulate odour emission by appropriate maintenance on time.



### Industrial EHS

Conduct environmental audits and improve your ESG scores by optimising environmental and occupational health and safety.

# AQBot Variants

Sensors	ID	Range	Resolution	Min. Det.	Working Principle	Expected Sensor Life
 Ammonia (NH <sub>3</sub> )	OZNH3_4 OZNH3_2* OZNH3_3	0-10 ppm 0-100 ppm 0-1000 ppm	0.015 ppm 0.3 ppm 2 ppm	0.015 ppm 0.3 ppm 2 ppm	Electrochemical	2 Years
 Methane (CH <sub>4</sub> )	OZCH4_2	50-1,000,000 ppm	1 ppm	50 ppm	MEMS	2 Years
 Hydrogen Sulfide (H <sub>2</sub> S)	OZH2S_1* OZH2S_2 OZH2S_3 OZH2S_4	0-1.5 ppm 0-50 ppm 0-200 ppm 0-2000 ppm	0.001 ppm 0.05 ppm 0.2 ppm 2 ppm	0.01 ppm 0.05 ppm 0.2 ppm 2 ppm	Electrochemical	2 Years
 Total Volatile Organic Compounds (VOC)	OZTVOC_1* OZTVOC_2	0-40 ppm 0-200 ppm	0.001 ppm 0.1 ppm	0.005 ppm 0.1 ppm	Photo Ionization Detection (PID)	2 Years #
 Particulate Matter (PM <sub>2.5</sub> , PM <sub>10</sub> , PM <sub>1</sub> , PM <sub>100</sub> )	OZPM_1*	Upto 5000 µg/m <sup>3</sup> for PM <sub>1</sub> , PM <sub>2.5</sub> , PM <sub>10</sub> ; Upto 30 mg/m <sup>3</sup> for PM <sub>100</sub>	0.1 µg/m <sup>3</sup>	1 µg/m <sup>3</sup>	Laser Scattering	18 Months
 Noise	OZN_2*	Up to 140 dB	1 dB	0.5 dB	Capacitive	2 Years
 Chlorine (Cl <sub>2</sub> )	OZCl2_1* OZCl2_2	0-20 ppm 0-50 ppm	0.05 ppm 0.1 ppm	0.05 ppm 0.1 ppm	Electrochemical	2 Years
 Hydrogen Chloride (HCl)	OZHCl_1 OZHCl_2	0-50 ppm 0-100 ppm	0.5 ppm 1 ppm	0.5 ppm 1 ppm	Electrochemical	2 Years
 Formaldehyde (CH <sub>2</sub> O)	OZCH2O_1* OZCH2O_2	0-10 ppm 0-50 ppm	0.05 ppm 0.1 ppm	0.05 ppm 0.1 ppm	Electrochemical	2 Years
 Methyl Mercaptan (CH <sub>3</sub> SH)	OZCH3SH_1*	0-10 ppm	0.1 ppm	0.1 ppm	Electrochemical	2 Years
 Sulfur Dioxide (SO <sub>2</sub> )	OZSO2_1* OZSO2_2 OZSO2_3	0-10 ppm 0-100 ppm 0-2000 ppm	0.001 ppm 0.2 ppm 5 ppm	0.01 ppm 0.2 ppm 5 ppm	Electrochemical	2 Years
 Nitrogen Dioxide (NO <sub>2</sub> )	OZNO2_1* OZNO2_2 OZNO2_3	0-10 ppm 0-100 ppm 0-500 ppm	0.001 ppm 0.2 ppm 0.5 ppm	0.01 ppm 0.2 ppm 0.5 ppm	Electrochemical	2 Years
 Carbon Monoxide (CO)	OZCO_1* OZCO_4 OZCO_2 OZCO_3	0-5 ppm 0-50 ppm 0-100 ppm 0-1000 ppm	0.01 ppm 0.05 ppm 0.1 ppm 0.75 ppm	0.01 ppm 0.05 ppm 0.1 ppm 0.75 ppm	Electrochemical	2 Years
 Nitric Oxide (NO)	OZNO_1* OZNO_2	0-5 ppm 0-100 ppm	0.001 ppm 0.5 ppm	0.01 ppm 0.5 ppm	Electrochemical	2 Years
 Carbon Dioxide (CO <sub>2</sub> )	OZCO2_2*	0-5000 ppm	1 ppm	400 ppm	Non-Dispersive Infrared	2 Years
 Oxygen (O <sub>2</sub> )	OZO2_1*	(0-25) %VOL	0.1 %VOL	0.1 %VOL	Electrochemical	2 Years
 BTEX	OZBTEX_1	0-10 ppm	0.001 ppm	0.001 ppm	Photo Ionization Detection (PID)	2 Years #
 Hydrocarbon / NMHC	OZHC_1	0-20 ppm	0.001 ppm	0.005 ppm	Photo Ionization Detection (PID)	2 Years #
 Chlorine Dioxide (ClO <sub>2</sub> )	OZClO2_1	0-1 ppm	0.05 ppm	0.05 ppm	Electrochemical	2 Years

# TVOC, BTEX & HC Sensor Housing: 2 years, TVOC, BTEX & HC Lamp is user replaceable: 10,000 hours

Expected Sensor Life can vary, subject to actual concentration on-site. In the interest of continued product improvement, we reserve the right to change design features and specifications without prior notification. The data contained in this document is for guidance only, Oizom® accepts no liability for any consequential losses, injury or damage resulting from the use of this document or the information contained within.

\*Indicates standard delivery timeline

# Specifications

## Mechanical

Size	210MM(W) x 258mm(H) X 105mm(D)
Weight	2.8 Kg (instrument weight)
Material	NEMA 4X Fire Retardant FRP Enclosure
Certifications	CE, IP66, RoHS, FCC, PTCRB, ICASA
Installation Method	Pole Mount / Wall Mount

## Electrical

Avg. Power Consumption	3.5 Watt (Actual consumption will vary upon the type of parameters)
Power Input Options	AC : External 90-265V AC, 50-60Hz DC : Uninterrupted 12V DC or 24V DC, 2 Ampere
Certifications	CE, RoHS, cURus UL, IEC/EN61000-4 and CISPR32/EN55032 & IEC/UL/EN62368 standard.

## Technical

Processor	Quad Core ARM Cortex
Memory	2GB RAM / 16 GB eMMC ROM
Device Interface	Display / On-device Software / API / Cloud Platform
Internal Data Storage	Up to 16 GB or 90 days

## Environmental









Operating Temperature	-20 °C to 60 °C
Operating Humidity	0-93% RH
Recommended Humidity	20-90% RH
Recommended Temperature	-20°C to 45°C
Storage Conditions	10 - 40°C

## Communication

Data Interval	2-30 minutes (configurable)
Data-push Protocol	HTTPS post request to host server
Data-pull	HTTPS request on device IP
Firmware Updates	Over-The-Air Firmware Update
Standby Connectivity	GSM (2G/3G/4G) for remote diagnosis, FOTA updates, and cloud calibration

## Sensing

Gas Sample Mode	Natural Diffusion
Warm up time	< 48 hours for data stabilisation
Response Time (t90)	< 60 seconds
Signal Refresh Rate	5 seconds
Measuring Range	Refer Parameter Table
Accuracy	<±5% FS (at 20±5°C/50±20%RH)
Sensor Life	Refer Parameter Table


Connectivity Options		Specification
Wireless	 GSM	Global 2G / 3G / 4G
	 LTE	CAT-M1
	 WiFi	AP Mode and Station Mode
	 Satellite	Satellite
Wired	 Ethernet	Static / DHCP Configuration
	 Modbus	RS485 RTU / TCP
	 RELAY	2 Channel Relay Output
	 4-20mA	4-20 mA Current Loop

Note: LoRa, NBIoT, Sigfox available as an option

# Solution Architecture



## Envizom™ Data Visualisation and Analytics Platform

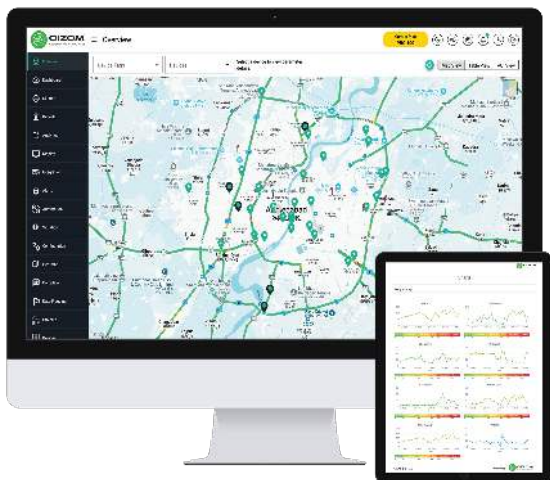

Envizom™ is Oizom's Environmental visualisation & analytics platform, built to turn complex air quality data into actionable insights. Providing remote visibility & control, it consolidates data from multiple sites, parameters, & devices into a single, intuitive dashboard. Our Environmental Data Interpretation Engine, powered by Artificial Intelligence & Machine Learning algorithms, provides accurate, real-time data, helps identify pollution sources, & understands directional trends. From city-wide comparisons to site-specific trends, smart multi-dimensional analytics enable comparisons across locations, parameters, & time spans. Envizom™ uses secure servers for data storage and on-premise storage is also supported.

The Report module offers immediate and automated daily/weekly/monthly reports on emissions. The automation module enables users to activate third-party pollution control equipment, ensuring timely and precise intervention to maintain optimal environmental conditions.



# Envizom™ Capabilities



Real-time Data



Smart Alerts



Custom Thresholds



Process Automation



Trend Analysis



Automated Reports

## Privacy First Platform



### Data Privacy

The data shared with the client uses an encryption server through Secure Socket layers. Envizom™ also uses AES encryption for connection that adds to data safety.



### Data Ownership

Envizom™ creates a secure and encrypted password combination for the user login. Oizom® ensures 100% privacy of the data and doesn't share without relevant permissions.



### Data Transparency

Data collected from Oizom® equipment runs through the Environment Data Interpretation Engine. It processes various algorithms and eliminates environmental impact interferences on the sensors.



SANS



OWASP



IEC 62443-4-1



Security Tested



100w Cybersecurity Practices



TCM SECURITY

# Case Studies



## Monitoring Dust Particles at the Amara Raja Manufacturing Plant

Amara Raja installed Oizom's AQBot PM™ to monitor particulate matter in real-time, helping maintain a safe, clean, and compliant production environment within its manufacturing facility.



India



AQbot  
PM



Industrial  
Monitoring

## AQBot™ is Monitoring Noise Levels at ArcelorMittal's Steel Plant

To manage industrial noise and support regulatory compliance, ArcelorMittal deployed AQBot™ Noise at its steel plant for continuous monitoring, enabling proactive noise control and worker protection.



India



AQbot  
Noise



Industrial  
Monitoring



## Real-time CH<sub>2</sub>O Monitoring in Australian Workplaces

In partnership with Ektimo, Australian industries installed Oizom's AQBot™ CH<sub>2</sub>O to detect formaldehyde levels in real-time, ensuring safer working conditions and better air quality management.



Australia



AQbot  
CH<sub>2</sub>O



Industrial  
EHS



# Case Studies



## Monitoring SO<sub>2</sub> and CH<sub>4</sub> at Reliance Chemical Products Ltd., Nigeria

Reliance Chemical Products Ltd. implemented AQBot™ SO<sub>2</sub> and AQBot™ CH<sub>4</sub> to monitor sulfur dioxide and methane levels, ensuring environmental compliance and worker safety at their industrial site.



Nigeria



AQbot  
SO<sub>2</sub> & CH<sub>4</sub>



Industrial  
EHS

## Lokhandwala Developers Deploy AQBot™ PM for Dust Monitoring at Construction Sites

To ensure dust control and regulatory adherence, Lokhandwala Developers installed AQBot™ PM for real-time particulate monitoring across construction locations, supporting healthier and cleaner environments.



India



AQBot PM



Construction  
Monitoring



## Chlorine Gas Monitoring at a Common Effluent Treatment Plant in Jetpur

A Common Effluent Treatment Plant (CETP) in Jetpur installed Oizom's AQBot™ Cl<sub>2</sub> to monitor chlorine gas levels in real time for safer plant operations and to help maintain efficient wastewater treatment.



India



AQbot  
Cl<sub>2</sub>



Wastewater



# Industrial Applications



## Paper And Pulp Industry

$H_2S$  - Lime kiln and evaporator

TVOC - Chemical pulping, bleaching and evaporator

$CO_2$  - Fuel combustion, lime kiln

$CH_3SH$  - Digester, black liquor storage, recovery boiler



## Textile Industry

NO - Sizing process

TVOC - High temperature ovens - drying and coating

$Cl_2$  - Bleaching process

PM - Cotton handling process and boiler



## Leather Industry

$H_2S$  &  $NH_3$  - Beamhouse, unhairing and liming process

TVOC - Finishing operations - drying

PM - Storage and handling of powdered chemicals

$Cl_2$  - Pickling process



## Fisheries Industry

$H_2S$  - Bacteriological and enzymatic decay

NO - Cooking and drying - fishmeal industry

TVOC - Direct and indirect fried dryers

$NH_3$  - Fish rotting



## Chemical Reaction

TVOC - Storage Tanks & Solvent Use process

NOx - Combustion Processes & Nitric Acid Production

$SO_2$  - Combustion of Sulfur-Containing Fuels & Sulfuric, Acid Production, Sulphonation

PM - Handling of Raw Materials



## Thermal Power Plants

CO - Fuel combustion in boiler

NO - Natural gas/oil/coal based fuel combustion

$CO_2$  - Boiler fuel combustion

PM - Ash extraction plant



## Food And Beverages Industry

$Cl_2$  - In various disinfecting activities

$NH_3$  - Refrigeration and cooling systems

$CO_2$  - Carbonation and fermentation processes

$ClO_2$  - Disinfection and sanitisation processes



## Steel plant

PM - Basic Oxygen Furnace and Blast furnace

NOx & CO - Blast Furnace

$SO_2$  - Coke Ovens & Sinter Plant Crushing plant



## Wastewater Treatment Plants

$CH_4$  &  $CH_3SH$  - Sludge storage and anaerobic digestion

$Cl_2$  - Chlorination before outlet discharge



## Meat Processing Plants

$H_2S$  - Storage and ETP

$CH_4$  &  $CH_3SH$  - By product, storage & ETP



## Dairy Industry

$NH_3$  - Manure storage and application

$CH_4$  - Manure in housing and enteric fermentation



## All Industries

Noise - In every operation including rotary mechanical components

*\*This is an indicative list.*

*Speak to our representative for your exact requirement.*

# Data and Calibration



## 1 Laboratory Calibration

All air quality monitoring systems are calibrated at the ISO/IEC 17025:2017 certified calibration laboratory using standard NIST traceable calibration gas standards as per the international guidelines by U.S. EPA. (Vol II, Section 6.0 Rev.1)

## 2 Collocation Calibration

Post lab calibration, the monitors are operated adjacent to a custom-built reference station housing U.S. EPA-designated Federal Equivalent Method (FEM)/Federal Reference Method (FRM) for collocation calibration to ensure optimum data quality.

## 3 On-site Calibration

On-site calibration of Oizom® devices can be performed using standard calibration gas cylinders of known concentration or by co-locating with a reference standard.

# Other Oizom® Products



### Odosense®

Odour Monitoring System

Odosense® monitors various odourful and toxic gases and provides insight into odour dispersion.



### Dustroid®

Real-time Dust Monitor

Dustroid® is an online particulate monitoring system to measure various particulate matter sizes.



### Weathercom®

Automatic Weather Station

Weathercom® is an automatic weather station designed to measure various meteorological parameters.



### Polludrone®

Ambient Air Quality Monitoring

Polludrone® is an ambient air quality monitor that measures particulate matter, gases, and weather parameters.



### Pollusense™

Portable Air Quality Monitor

Pollusense™ is a portable air quality monitor that measures multiple toxic gases and particulates.







Trusted by

**80+ Countries**



Solutions Installed in

**90+ Cities**



Total Devices Installed

**3500+**



Total Population Covered

**250 million+**

## Oizom Customers



**Changing the way Industries monitor air quality**



Get in touch



House No.2, Garden View Corporate House,  
Opp. Bodakdev Auda Garden, Ahmedabad, India

✉ [contact@oizom.com](mailto:contact@oizom.com) / [connect@oizom.com](mailto:connect@oizom.com)

☎ +91 88666 60025 / 39